


SPECIFICATIONS

Product Name	ELECTRONIC CHART DISPLAY AND INFORMATION SYSTEM	
Standards	IMO MSC.232(82), IMO A.694(17), IMO MSC.191(79), IEC 61174 Ed. 3, IEC 61162-1 Ed. 4, IEC 61162-2 Ed. 1, IEC 62288, IEC 60945 Ed. 4	
Monitor Unit	24" wide color LCD, Full HD (1920 x 1080 pixels)	
Chart Materials	IMO/IHO S57 edition-3 ENC vectorized material (IHO S-63 ENC data protection scheme), ARCS rasterized material, C-MAP and CM-93/3 vectorized materials (optional Jeppesen e-token required)	
Display Modes	True Motion	North-up, Course-up
	Relative Motion	North-up, Course-up, Route-up, Heading-up
Data Presentation	Own Ship	Own ship's mark and numeral position in lat/lon, speed, course, etc.
	Target Tracking (TT: ARPA, AIS)	Target information from AIS and TT (range, bearing, speed, course, CPA/TCPA)
	Cursor	EBL, VRM
Alarm Information	Waypoint, route monitoring and several alarms	
Position Calculation	Navigation by result from external position sensor	
	Dead reckoning with gyro and log Data from gyro, log, and position sensors to be fed to mathematical filter to generate highly accurate position and speed	
Navigation Planning	Planning by rhumb line, great circle	
Route Monitoring	Off-track display, waypoint arrival alarm, shallow depth alarm	
User Chart	User chart creation and display (up to 500 points for lines and symbols)	
MOB (Man Overboard)	Position, and other data at time of man overboard are recorded MOB mark is displayed on the screen	
Interface	DVI	1 port DVI-I for VDR 1 port DVI-D for repeater display (Video signal is identical to the one output to the main display)
	LAN	2 ports, Ethernet 1000 Base-T (for interswitch network and sensor network)
	USB	6 ports, USB 2.0 type-A
	Serial I/O	2 ports, IEC61162-1/2 2 ports, IEC61162-1 Sentences: THS, HDT, GNS, GGA, RMC, GLL, VTG, VBW, VHW, DTM, WPL, RTE, DPT, DBT, CUR, VDR, MWV, ZDA, MTW, ROT, VDM, VDO, ALR, ETL, HTD, NRM, NRX, OSD, PRC, ROR, RPM, RSA, RSD, TRC, TRD, TTM, XDR, ABK

RADAR CONNECTION BOX

Radar input	2 ports
Ethernet	1 port

INTERCONNECTION DIAGRAM

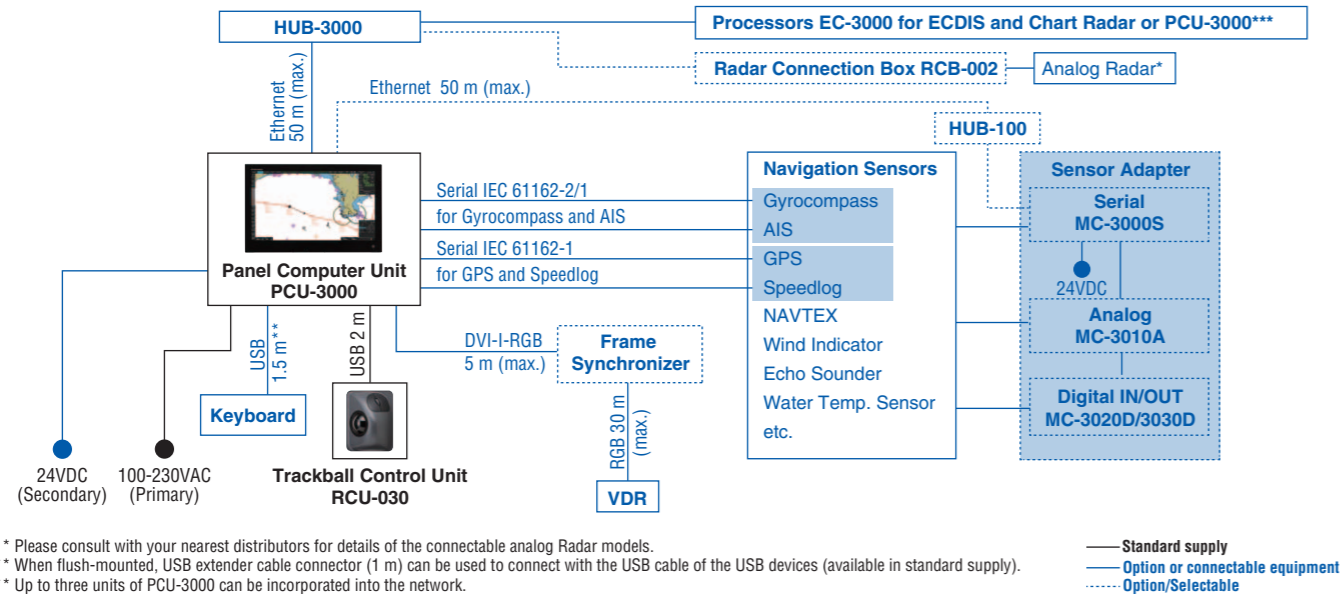

SENSOR ADAPTER

Control and Serial Input	LAN	1 port, Ethernet 100 Base-TX
	Serial	8 ports, IEC 61162-1/2 (4 ports), IEC 61162-1 (4 ports)
	Contact Closure	1 port for system fail, normal close or normal open
Analog Input	3 ports/unit, -10 to +10V or 0 to 10V, 4 to 20 mA, selectable	
Digital Input	8 ports/unit, normal close or open, selectable	
Digital output	8 ports/unit, normal close or open, selectable	

POWER SUPPLY

Main Unit	100-230 VAC 50/60 Hz (Primary), 24 VDC (Secondary)
Radar Connection Box	12 VDC/24 VDC
Sensor Adapter	24 VDC, 1.4 A

ENVIRONMENTAL CONDITION

Ambient Temperature	-15°C to +55°C	
Relative Humidity	93 % or less at 40°C	
Degree of Protection	Panel PC	IP65 (front side) IP22 (back side)
	Trackball Control Unit	IP22
	Radar Connection Box	IP22
Vibration	IEC 60945 Ed. 4	

EQUIPMENT LIST

Standard			
1	Panel Computer Unit	PCU-3000	1 unit
2	Trackball Control Unit	RCU-030	1 unit
3	Standard spare parts, installation materials and accessories, incl. ENC dongle*		1 set
* Jeppesen e-token is not included.			
Option			
1	Sensor Adapter		1 set
	MC-3000S Control Serial		
	MC-3010A Analog		
	MC-3020D Digital IN		
	MC-3030D Digital OUT		
2	Switching Hub HUB-100 for sensor network		1 unit
3	Intelligent Hub HUB-3000 for interswitch network		1 unit
4	Radar Connection Box RCB-002 for interface with 3rd party radar		1 unit
5	Mounting bracket for table-top mount		1 unit
6	Cable Clamp for PCU-3000		1set
7	USB Keyboard		1 unit
8	Fixing Bracket for RCU-030		1 set

All brand and product names are registered trademarks, trademarks or service marks of their respective holders.
 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

FURUNO ELECTRIC CO., LTD.
 Nishinomiya, Hyogo, Japan
 www.furuno.com

FURUNO U.S.A., INC.
 Camas, Washington, U.S.A.
 www.furunousa.com

FURUNO (UK) LIMITED
 Havant, Hampshire, U.K.
 www.furuno.co.uk

FURUNO FRANCE S.A.S.
 Bordeaux-Mérignac, France
 www.furuno.fr

FURUNO ESPAÑA S.A.
 Madrid, Spain
 www.furuno.es

FURUNO DANMARK A/S
 Hvidovre, Denmark
 www.furuno.dk

FURUNO NORGE A/S
 Ålesund, Norway
 www.furuno.no

FURUNO SVERIGE AB
 Västra Frölunda, Sweden
 www.furuno.se

FURUNO FINLAND OY
 Espoo, Finland
 www.furuno.fi

FURUNO POLSKA Sp. z o.o.
 Gdynia, Poland
 www.furuno.pl

FURUNO EURUS LLC
 St. Petersburg, Russian Federation
 www.furuno.com.ru

RICO (PTE) LTD
 Singapore
 www.rico.com.sg

FURUNO DEUTSCHLAND GmbH
 Rellingen, Germany
 www.furuno.de

FURUNO HELLAS S.A.
 Piraeus, Greece
 www.furuno.gr

FURUNO (CYPRUS) LTD
 Limassol, Cyprus
 www.furuno.com.cy

FURUNO KOREA CO., LTD.
 Busan, Korea

13103SK Printed in Japan
 Catalogue No. M-1559

ECDIS

Electronic Chart Display and Information System

Model: FMD-3100 (with 24" wide LCD)



with an optional keyboard

A solution to support smooth transition from paper-based navigation to electronic navigation



24" wide LCD (Full HD: 1920 x 1080 pixels)



with an optional keyboard

ECDIS Electronic Chart Display and Information System

Model: FMD-3100 (with 24" wide LCD)

Streamlined integration into the onboard navigation system; perfectly suited for ECDIS retrofitting projects

- 2 LAN ports and 4 serial ports are available to facilitate smooth integration into a bridge network as well as interface with onboard navigation sensors

- Flexibility in installation; supporting both table-top mounting* as well as flush-mounting to match the space availability in the wheelhouse

*Optional mounting bracket for table-top mounting required.



Mounting Bracket for table-top mounting

Instantaneous chart redraw delivered by FURUNO's advanced chart drawing engine, making redraw latency a thing of the past



Instantaneous chart redraw

Suitable for both primary and back-up ECDIS

Dual configuration of the FMD-3100 supports the vessel to go paperless. For those who have already installed the FMD-3200/FMD-3300 onboard the vessel, the FMD-3100 can be used as a cost-effective back-up arrangement for the FMD-3200/FMD-3300 ECDIS.

Easily interfaces with existing FAR-2xx7 series Radar for:

- Radar overlay
- Route and waypoint
- Target track info
- User Charts

exchange via Ethernet

*for Radar overlay with analog Radar such as FAR-2xx5 series, the optional RCB-002 Radar Connection Box is required.




Complies with the following IMO and IEC regulations:

- IMO MSC.232(82)
- IEC 61162-1 Ed. 4
- IEC 61174 Ed. 3
- IMO A.694(17)
- IEC 61162-2 Ed. 1
- IEC 62288

Task-based operation realized by combination of Status bar and InstantAccess bar providing quick access to the needed tasks/functions

The user interface of the FMD-3100 centers on carefully organized operational tools: Status bar and InstantAccess bar. The Status bar contains information about the operating status, and the InstantAccess bar contains all the tasks available. These operational tools deliver straightforward, task-based operation by which the operator can quickly perform navigational tasks without having to go deeper into an intricate menu tree.

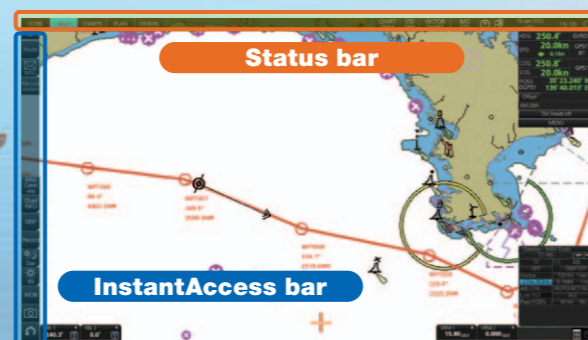

Drop-down menu to facilitate streamlined operation

On the buttons in the Status bar and InstantAccess bar indicates that there are hidden options of actions/tasks to be performed in the sub-layer, which can be initiated by left-clicking the buttons. This way, the operator can quickly gain access to the related tasks.

Compatible cartography

- IHO/S-57 Edition 3 vector chart (IHO S-63 data protection scheme)
 - Admiralty Vector Chart Service by UKHO
 - C-MAP ENC*
 - Jeppesen Primar ECDIS Service*
- ARCS raster chart
- C-MAP Professional+**

*Jeppesen e-token is not included in the standard supply.

**C-MAP Professional+ is a private chart, hence not construed as replacement for paper chart.

- Interface with Jeppesen Dynamic Licensing Service available
- Compatibility with Admiralty Information Overlay (AIO) for further navigation safety


Additional AIO layer includes all Admiralty Temporary and Preliminary Notices to Mariners as well as additional ENC Preliminary Notices to Mariners, i.e., reported navigational hazards that have been incorporated into a paper chart, but have yet to be included in ENCs. The service is free of charge as part of Admiralty Vector Chart Service (AVCS) by UKHO.



AIO data layer displayed



Electronic Navigation Chart (ENC)

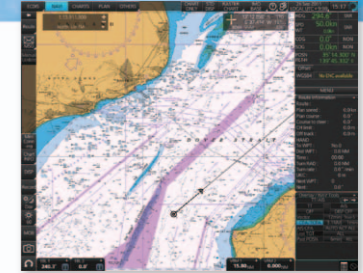

Raster Navigation Chart (RNC)


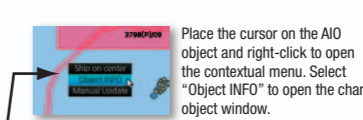


Chart object window




On the chart object window, select the AIO object and click "OK" to view the details.

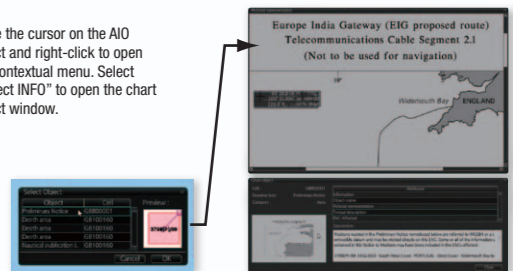

The full text of the Notice to Mariners as well as associated diagrams can be displayed subsequently.

Panel Computer Unit



PCU-3000
11.2 kg 24.6 lb



Cutout for flush mount

Trackball Control Unit



RCU-030
0.4 kg 0.88 lb



Cutout for flush mount


Radar Connection Box

RCB-002
3.3 kg 7.28 lb





Switching Hub

HUB-100
1.5 kg 3.31 lb





Intelligent Hub

HUB-3000
1.5 kg 3.31 lb

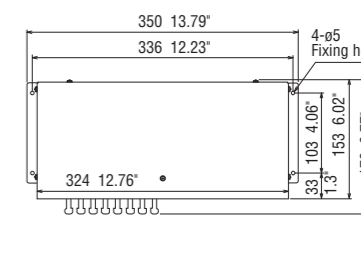


Sensor Adapter

Serial MC-3000S
1.5 kg 3.3 lb




Analog MC-3010A

0.8 kg 1.8 lb



Digital In MC-3020D

0.8 kg 1.76 lb

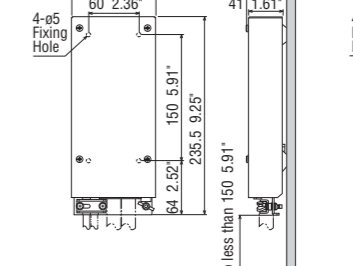

Digital Out MC-3030D

0.8 kg 1.76 lb

