


With the ONWA KC-2W firmware **N2K_0183_20210322** update, user can use a PC browser to configure KC-2W settings, such as output baudrate, output update rate, change WIFI username and password etc..

Note: This function can be used only by KC-2W with WIFI module


1) Connect the PC Wi-Fi to KC-2W


Step 1. Move the cursor to the Wi-Fi connection icon (1) and left click to open Network and Internet settings

Step 2. Connect to KC2W Wi-Fi connection (2)

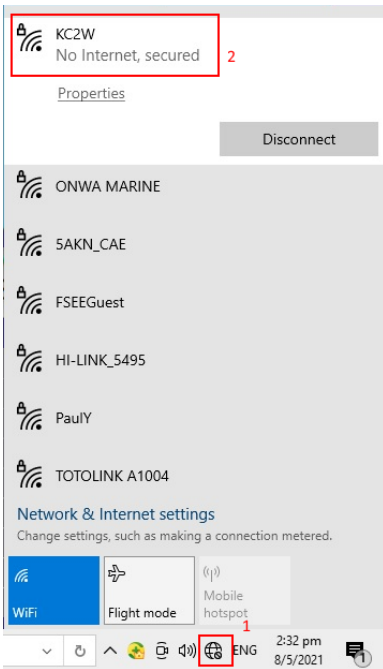

2) Open your Internet browser (example IE or Chrome) and type <http://192.168.4.1>

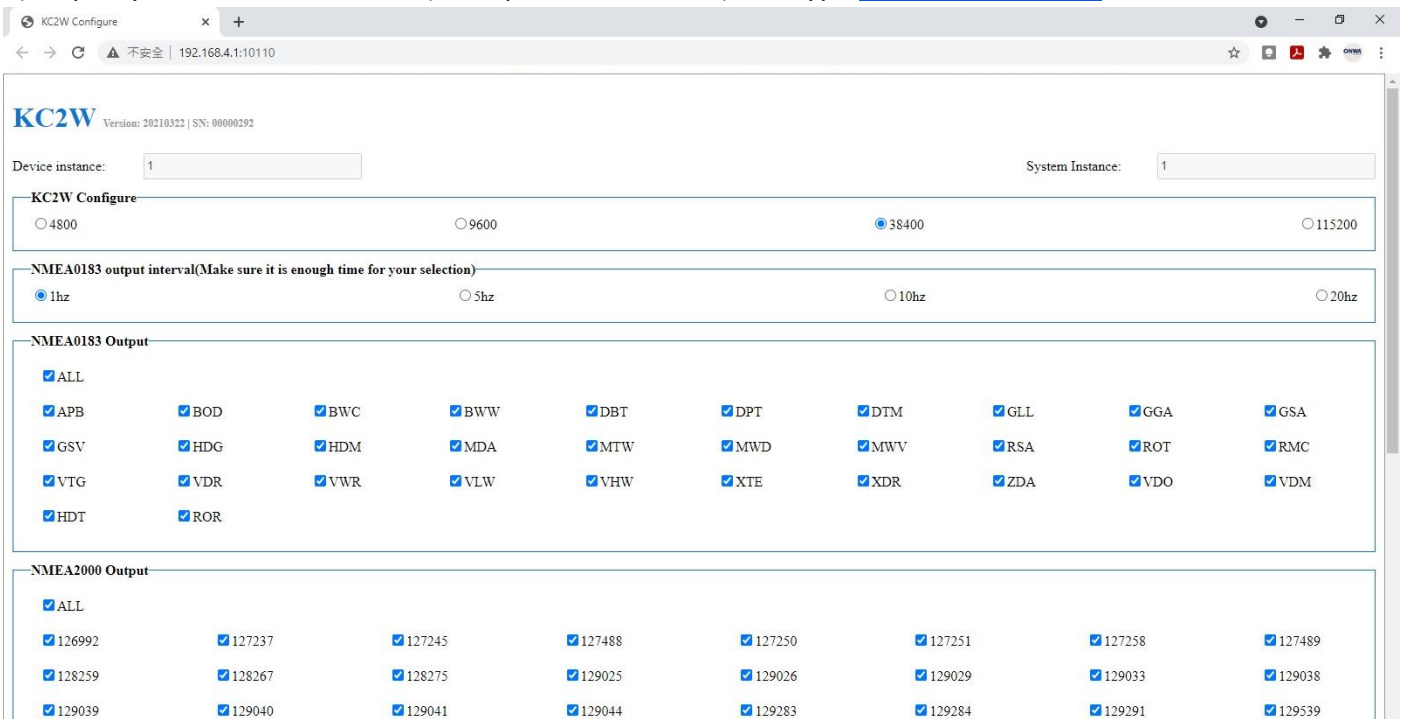

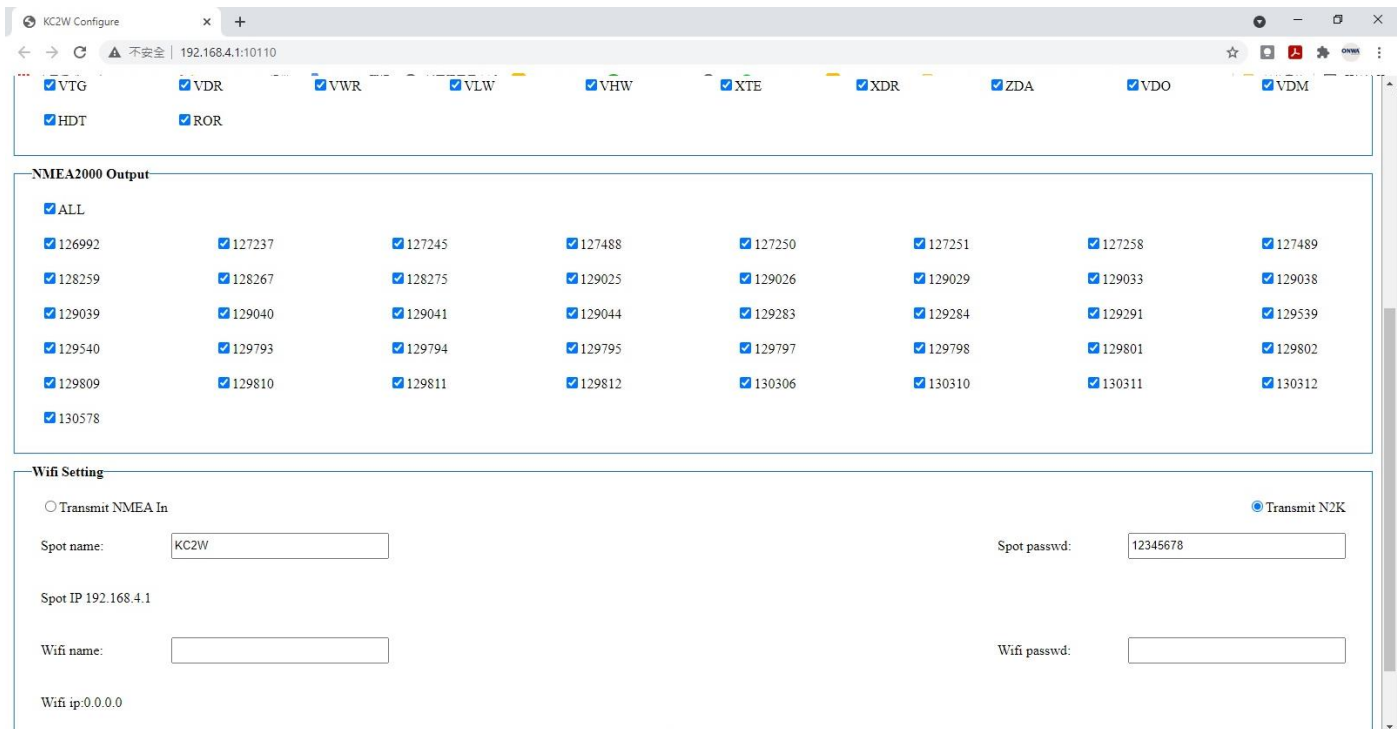

- 3) Once the KC2W webpage is open, You can now configure all settings of the ONWA KC-2W, simply click on the item you want to change.
 Example: You want to change KC-2W NMEA0183 output baudrate from 38400 (default) to 9600, All you need to do is simply click “9600”.
 Then you will see a “success” message appear on the screen, that means the configuration is accepted.

